


Drawing



Certifications

EN 12815
DIN 18880

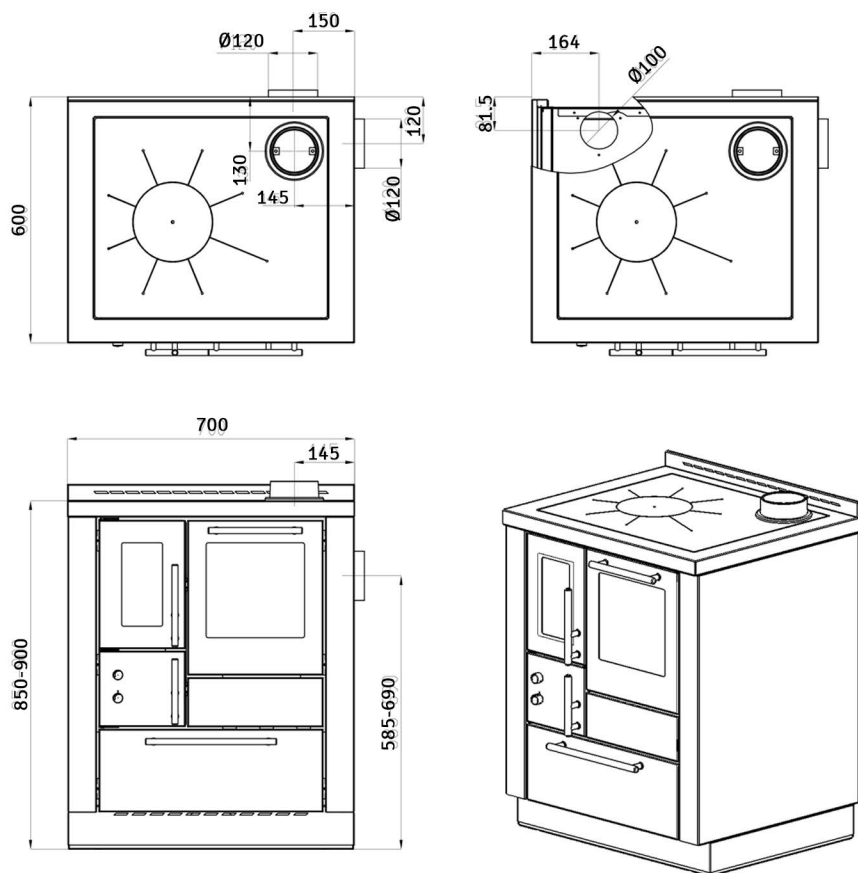

ART. 15A B-VG

Öko Combustion



EXTERNAL AIR
INTAKE



ÖKO SERIES



AUTOMATIC
CONTROL



MANUAL
CONTROL

Technical specifications - rated power			Dimensions		
Power	7,1	kW	Firebox stokehole W/H	165x258	mm
Efficiency	82,3	%	Firebox size W/H/D	172/280/400	mm
Hourly consumption	2	kg/h	Oven size W/H/D	260/275/440	mm
Average flue gas temperature	228,5	°C	Hob W/H/D	567/487/8	mm
Draft flow rate	11	Pa	Flue pipe diameter	Ø120	mm
CO at 13% of O ₂	0,13	%	Adjustable height	850-900	mm
Dust particles at 13% of O ₂	39,2	mg/Nm ³	Weight	197	kg
Technical specifications - reduced power					
Power	3,5	kW			
Efficiency	88,5	%			
Hourly consumption	1	kg/h			
Average flue gas temperature	125,5	°C			
Draft flow rate	11	Pa			
CO at 13% of O ₂	0,16	%			
Dust particles at 13% of O ₂	-	mg/Nm ³			